


Fan-Eze Installation Instructions

Customer Support 801-254-5144

www.eeproductsinc.com/directions.htm

CAUTION:


DO NOT USE WITH RE - WORK, OR BAR HANGER BOXES

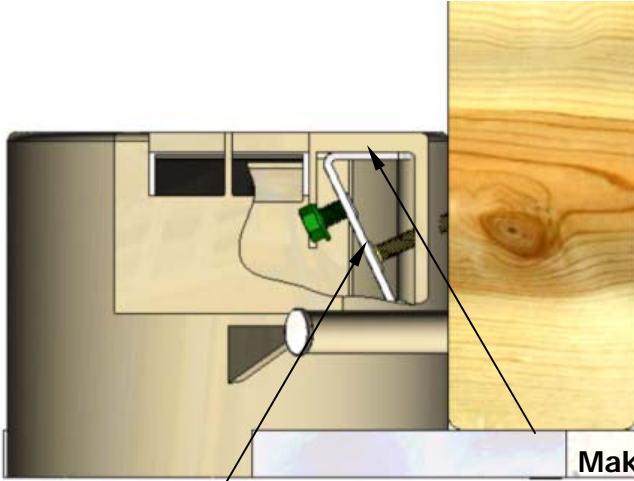

If the box has a flat just place it against the flat & bottom of the box

Make sure the Bracket is setting on the bottom of the box

1. Turn OFF power at the BREAKER, failure to do so can result in serious electrical shock.
2. Remove Light Fixture or fan
3. After placing the die cut adhesive on push up & place Fan-Eze on side of the ceiling box that is against the joist or truss, the adhesive will hold it in place for the next step.
4. Install the grabbers, for metal boxes pre-drill holes using a 3/16" bit.
5. Install ceiling fan or light fixture.
6. Done in about 2 minute's.

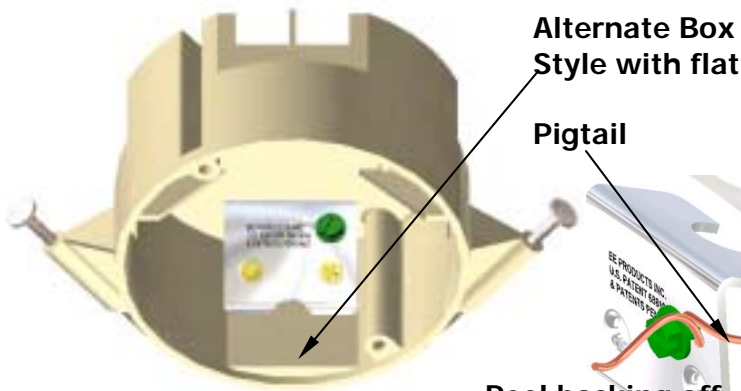

Alternate Box Style with flat

Pigtail

Peel backing off one side and place it on the FAN-EZE as shown, remove top backing & Install

Use the green Screw to ground the box, the ground lead from the cable & fan can be attached here

TIPS:

To find the side of the box that is against the joist or truss, push on the edge of the box; the side that flexes is not against the truss.

Angle the grabber screws (provided) into the bracket while holding the bracket as shown above, tighten the screws. To make this easier pre-drill the holes with a 3/16" bit until the bit just clears the box. DO NOT drill into the joist or truss. It is important that the screws create their own holes in the joist or truss for maximum holding strength. The screws only need to be snug (fairly tight); they do not have to be tightened all the way.

CAUTION: The screws can crush the bracket if too much torque is applied. Attach your ground wire to the Fan-Eze first then install, make a pig tail for your grounding wire, use one end for cable ground the other for your fan or fixture.

